
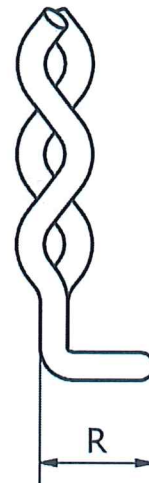
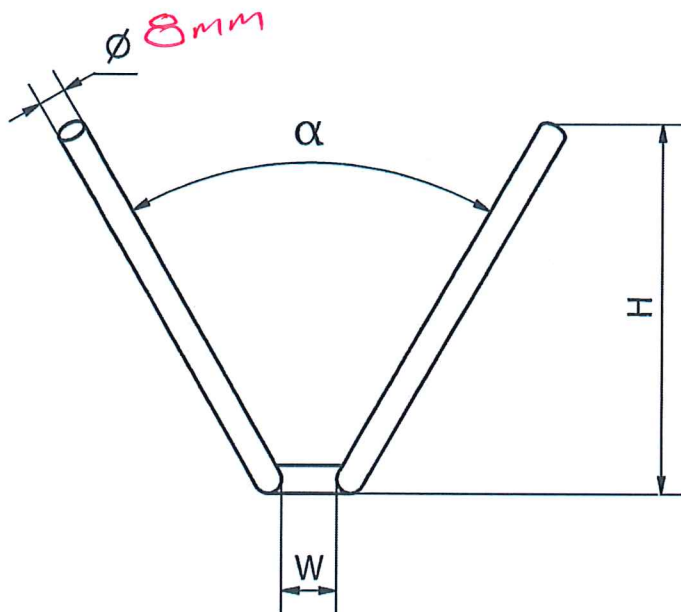
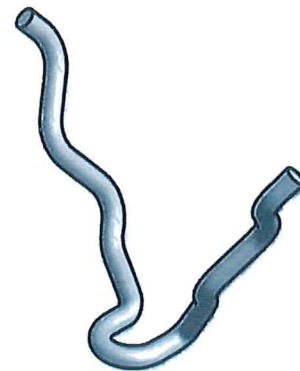


ALL ANCHORS TO BE SUPPLIED WITH POLYETHYLENE CAP ON EACH TYPK

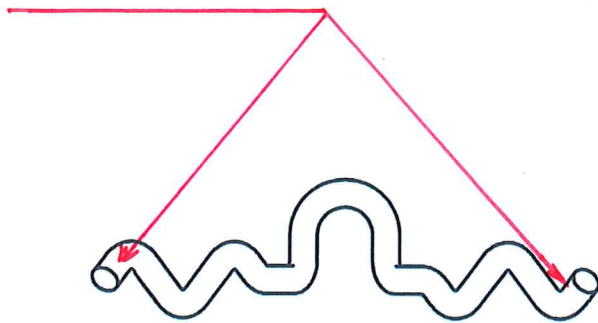

MATERIAL: 253 MA OR APPROVED EQUIVALENT

VCL 75 →

1. ALL DIMENSIONS CAN BE VARIED TO SUIT PROJECT REQUIREMENTS. THE INCLUDED ANGLES CAN ALSO BE VARIED IF REQUIRED.
2. THIS ITEM CAN BE MANUFACTURED IN VARIOUS ALLOY STEELS

VCL 125 →

| STANDARD SIZES | | |
|----------------|---------------|---------------|
| HEIGHT | W | ANGLE |
| 50 | 12 | 90 |
| 65 | 12 | 60 |
| 75 | 12 | 60 |
| 80 | 12 | 60 |
| 90 | 12 | 60 |
| 100 | 12 | 60 |
| 115 | 12 | 60 |
| 125 | 12 | 60 |



9 Chicago Avenue, Blacktown (Sydney)
NSW 2148 Australia
PH: (+612) 9622 9622 - FAX: (+612) 9622 9199
Web: www.antec.com.au
Email: antec@antec.com.au

Drawing Name:

VCL ANCHOR

This Drawing is the property of Antec Engineering Pty Ltd and is supplied on the understanding it is not to be used for any purpose, copied or communicated to any other person without written permission of the proprietor. All rights are reserved for product design concept. Antec products are guaranteed to conform within normal commercial tolerance of the applicable description furnished and to be manufactured from material as specified. No other guarantees or warranty, including warranty for fitness of products for in service operating condition shall exist in connection with sale of Antec products. Heat treatment after manufacture is not included unless specified.

Revision:

| | | |
|--------------|--------------|--------------|
| 1 | 2 | 3 |
| 4 | 5 | 6 |

AN 03