

# **GAS PRESSURE REGULATORS CATALOG**

*For Industrial Engines and Generator Sets*



**MAXITROL<sup>®</sup>**

# GAS PRESSURE REGULATORS

*For Industrial Engines and Generator Sets*



## ⚠ WARNING

**Service and or installation must be performed by a trained, experienced service technician. No untrained person should attempt to install, maintain, or service a gas pressure regulator.**

All products, including gas pressure regulators, used with combustible gas MUST be installed and used strictly in accordance with instructions of the manufacturer, with government codes and regulations, and plumbing codes and practices. Maxitrol's gas appliance pressure regulators should be installed and operated in accordance with our "Safety Warning Bulletins".

Maxitrol Company is NOT responsible for any errors or omissions in reliance by anyone of any information set forth in this catalog without additional reference to local requirements and applicable ordinances or codes.

[Other worldwide approvals and certifications available upon inquiry.](#)

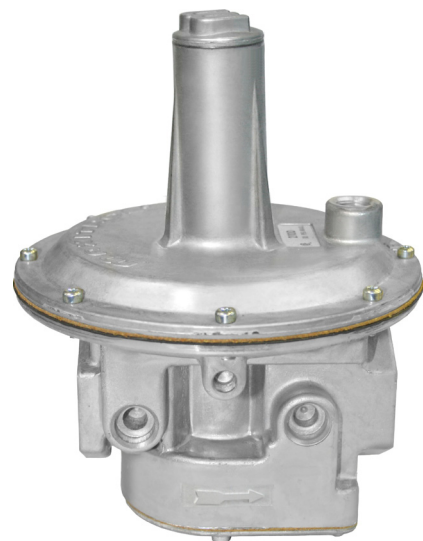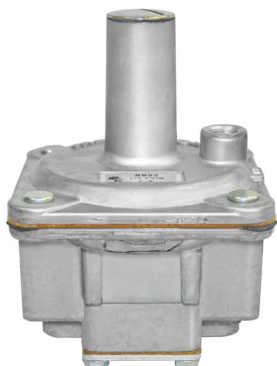

## Table of Contents

### *RV Series* - **Straight-Thru-Flow Design**

Description .....	4
Specifications .....	4
Certifications .....	5
Pressure Tap Identification Numbers .....	6
Capacities .....	6
Spring Selection Charts .....	7
Dimensions .....	8
Cutaway w/Callouts .....	9
Pressure Drop Chart .....	22

### *R/RS Series* - **Balanced Valve Design**

Description .....	10
Specifications .....	10
Certifications .....	11
Pressure Tap Identification Numbers .....	12
Capacities .....	12
Spring Selection Charts .....	13
Dimensions .....	14
Cutaway w/Callouts .....	15
Pressure Drop Chart .....	23

### *210 Series* - **Balanced Valve Design**


Description .....	16
Specifications .....	16
Certifications .....	17
Pressure Tap Identification Numbers .....	18
Capacities .....	18
Spring Selection Charts .....	19
Dimensions .....	20
Cutaway w/Callouts .....	21
Pressure Drop Chart .....	24

# RV SERIES

*Straight-Thru-Flow Design*

## Description

Maxitrol's original straight-thru-flow (STF) design regulators are non-lockup type regulators for high capacities at low inlet pressures. The difference between STF design and other type regulators is the conical valve. The cone principal permits gas to flow straight through the regulator without changing directions. Frictional flow resistance is reduced, resulting in greater capacity. An improved flow pattern provides accurate, sensitive regulation at extremely low pressure differentials. Typical applications include residential, commercial, and industrial gas-fired appliances and equipment used on low/medium pressure gas supplies.

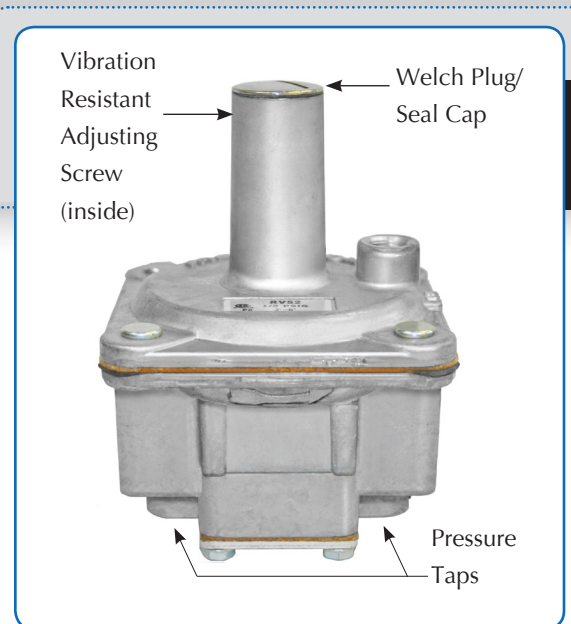

**RV52(M), RV53(M)**

**STRAIGHT-THRU-FLOW REGULATOR**

## Specifications

**Pipe Sizes** ..... 1/2" to 3" threaded connections with NPT threads or ISO7-Rp threads. 4" Flange only.

RV52(M): 1/2" x 1/2", 3/4" x 3/4"

RV53(M): 3/4" x 3/4", 1" x 1"

RV61(M): 1" x 1", 1 1/4" x 1 1/4"

RV81(M): 1 1/4" x 1 1/4", 1 1/2" x 1 1/2"

RV91(M): 2" x 2", 2 1/2" x 2 1/2"

RV111(M): 2 1/2" x 2 1/2", 3" x 3"

RV131(M): 4" x 4"

**Housing Material** ..... Aluminum or cast iron (RV131 only).

**Mounting** ..... RV52(M), RV53(M), RV61(M) multi-positional mounting (if ball check vent limiting device is installed, mount in an upright position only). RV81(M), RV91(M) (12A04 or 12A34), RV111(M), RV131, upright position only. Install with gas flowing as indicated by the arrow on bottom casting.

**NOTE:** All Maxitrol gas pressure regulators should be installed and operated in accordance with Maxitrol's Safety Warning Bulletins.

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. RV52M).

## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Certifications

	UL	CSA	CE
<b>Standard/Directive:</b>	ANSI/UL 842	ANSI Z21.18/CSA 6.3	EN 88 and GAD 2009/142/EEC
<b>Gas Types:</b>	Suitable for natural, manufactured, mixed gases, liquefied petroleum gases, and LP gas-air mixtures.	Suitable for natural, manufactured, mixed gases, liquefied petroleum gases, and LP gas-air mixtures.	Gas Families 1, 2, and 3 according to EN437
<b>Maximum Inlet Pressure:</b>	RV52(M), RV53(M), RV61(M), RV81*, RV91*, RV111*, RV131*: 1/2 psi (3.4 kPa)	RV52, RV53, RV61, RV81, RV91, RV111: 1/2 psi (3.4 kPa)	RV52M: 1.45 psi (10 kPa) RV53M, RV61M, RV81M, RV91M, RV111M: 2.9 psi (20 kPa)
<b>Outlet Pressure:</b>	RV52(M), RV53(M), RV81*, RV91*, RV111*, RV131*: 3" to 12" w.c. (0.75 to 3.0 kPa)  RV61(M): 1" to 6" w.c. (0.25 to 0.75 kPa)	RV52, RV53, RV81, RV91, RV111: 3" to 12" w.c. (0.75 to 3.0 kPa)  RV61: 2" to 12" w.c. (0.50 to 3.0 kPa)	RV52M: 1" to 22" w.c. (0.25 to 5.5 kPa)  RV53M, RV61M: 1" to 30" w.c. (0.25 to 7.5 kPa)  RV81M, RV91M, RV111M: 1" to 42" w.c. (0.25 kPa to 10.5 kPa)
<b>Ambient Temperature Ranges:</b>	---	RV52, RV53, RV61, RV81, RV91, RV111: -40° to 205°F (-40° to 96°C)	All Models: 5° to 176°F (-15° to 80°C)
<b>Vibration Resistant Adjusting Screw:</b>		RV81(M): R8111-001	RV91(M): R9111-001

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. RV52M).

\*RV81, RV91, RV111, RV131 are UL pending.

# RV SERIES

*Straight-Thru-Flow Design*

## Pressure Tap Identification Numbers

Model	Inlet	Outlet	Flow - UL Max	Flow - CSA Max
RV52(M)	2	1	450 CFH	450 CFH
RV53(M)			690 CFH	690 CFH
RV61(M)	1	2	900 CFH	900 CFH
RV81(M)*			---	2500 CFH
RV91(M)*			---	3275 CFH
RV111(M)*	---	---	---	7500 CFH
RV131			---	---

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. RV52M).

**\*NOTE:** RV81, RV91, RV111, RV131 are UL pending.

## Capacities: Expressed in CFH (m<sup>3</sup>/h) @ 0.64 sp gr gas

Model	Pressure Drop** - inches water column (kPa)									
	0.1 (0.02)	0.2 (0.04)	0.3 (0.07)	0.4 (0.10)	0.5 (0.12)	0.6 (0.15)	0.7 (0.17)	0.8 (0.20)	0.9 (0.22)	1.0 (0.25)
RV52(M)	151 (4.2)	214 (6.1)	262 (7.4)	302 (8.5)	338 (9.5)	370 (10.5)	400 (11.3)	427 (12.1)	453 (12.8)	478 (13.5)
RV53(M)	217 (6.1)	306 (8.6)	375 (10.6)	433 (12.2)	484 (13.7)	530 (15)	573 (16.2)	612 (17.3)	650 (18.4)	684 (19.3)
RV61(M)	379 (10.7)	536 (15.1)	675 (19.1)	759 (21.5)	848 (24)	929 (26.3)	1004 (28.4)	1073 (30.4)	1138 (32.2)	1200 (34.0)
RV81(M)	780 (22.1)	1102 (31.2)	1350 (38.2)	1559 (44.1)	1743 (49.5)	1909 (54)	2062 (58.4)	2204 (62.4)	2339 (66.2)	2465 (69.8)
RV91(M)	1212 (34.3)	1714 (48.5)	2100 (59.4)	2424 (68.6)	2711 (76.7)	2969 (84.1)	3208 (90.8)	3429 (97.1)	3637 (103)	3834 (108)
RV111(M)	2742 (78)	3878 (110)	4750 (134)	5485 (155)	6132 (175)	6718 (190)	7256 (205)	7757 (219)	8227 (233)	8572 (243)
RV131(M)	4734 (134)	6695 (190)	8200 (232)	9468 (268)	10586 (300)	11596 (328)	12525 (354)	13390 (380)	14202 (402)	14971 (424)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. RV52M).

\*\*See page 22 for pressure drop chart.

## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Spring Selection Charts

UL Certified Springs				
Model	Expressed in inches water column (kPa)			
RV52(M)	---	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV53(M)	---	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV61(M)	2 to 5 (0.50 to 1.25)	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV81, RV91, RV111, RV131 are UL Pending				

CSA Certified Springs				
Model	Expressed in inches water column (kPa)			
RV52	---	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV53	---	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV61	2 to 5 (0.50 to 1.25)	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV81	---	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV91	---	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
RV111	---	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)

CE Certified Springs							
Model	Expressed in inches water column (kPa)						
RV52M	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	---	---
RV53M	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.75 to 7.5)	---
RV61M	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	5 to 12 (1.25 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.75 to 7.5)	---
RV81M	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.75 to 7.5)	20 to 42 (5 to 10.5)
RV91M	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.75 to 7.5)	20 to 42 (5 to 10.5)
RV111M	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.75 to 7.5)	20 to 42 (5 to 10.5)
RV131M	2 to 5.5 (0.5 to 1.3)	---	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.75 to 7.5)	20 to 42 (5 to 10.5)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. RV52M).


# RV SERIES

*Straight-Thru-Flow Design*


**Dimensions:** Expressed in inches (millimeters)

Model	Vent	Swing Radius	Dimensions			
			A	B	C	D
RV52(M)	1/8" NPT	3.6 (91)	4.9 (124)	1.25 (32)	3.2 (81)	3.25 (83)
RV53(M)	1/8" NPT	3.9 (99)	5.2 (132)	1.3 (33)	3.75 (95)	3.9 (99)
RV61(M)	1/8" NPT	4.8 (122)	6.4 (164)	1.6 (41)	4.4 (111)	5.4 (138)
RV81(M)	3/8" NPT	6.4 (162)	8.4 (213)	2 (51)	6 (153)	7 (178)
RV91(M) 2.0" Pipe	1/2" NPT	8.5 (216)	10.8 (275)	2.3 (60)	6.5 (165)	9.1 (232)
	M: 1/2 ISO7					
RV91(M) 2.5" Pipe	1/4" NPT	8.3 (212)	10.5 (267)	2.4 (62)	7.1 (181)	9.1 (232)
RV111(M)	3/4" NPT	11.5 (284)	15.1 (373)	3.5 (89)	9 (229)	13.4 (324)
	M: 3/4 ISO7					
RV131(M)	3/4" NPT	18.2 (462)	23.3 (592)	5.1 (130)	13.9 (353)	18 (457)
	M: 3/4 ISO7					


**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. RV52M).

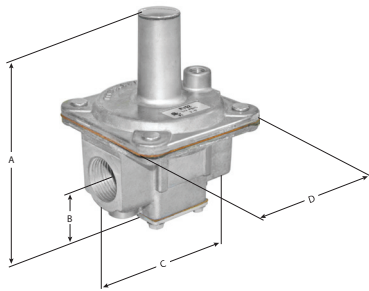

RV52(M), RV53(M)

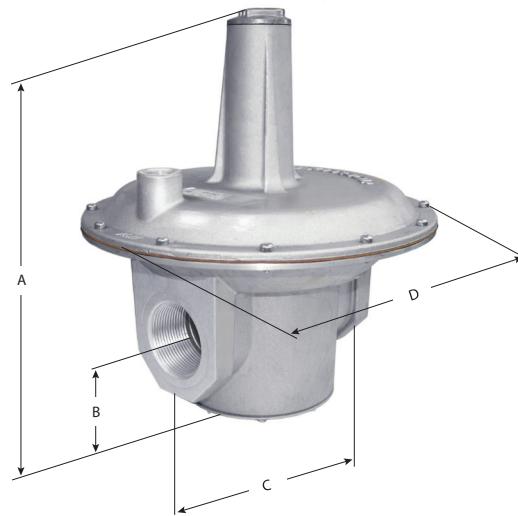

RV111(M), RV131(M)

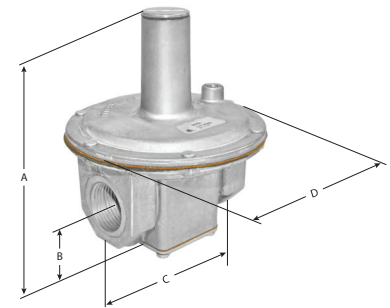


RV61(M), RV81(M), RV91(M)

**NOTE:** Dimensions are to be used only as an aid in designing clearance for the valve. Actual production dimensions may vary somewhat from those shown.



## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Straight-Thru-Flow Design

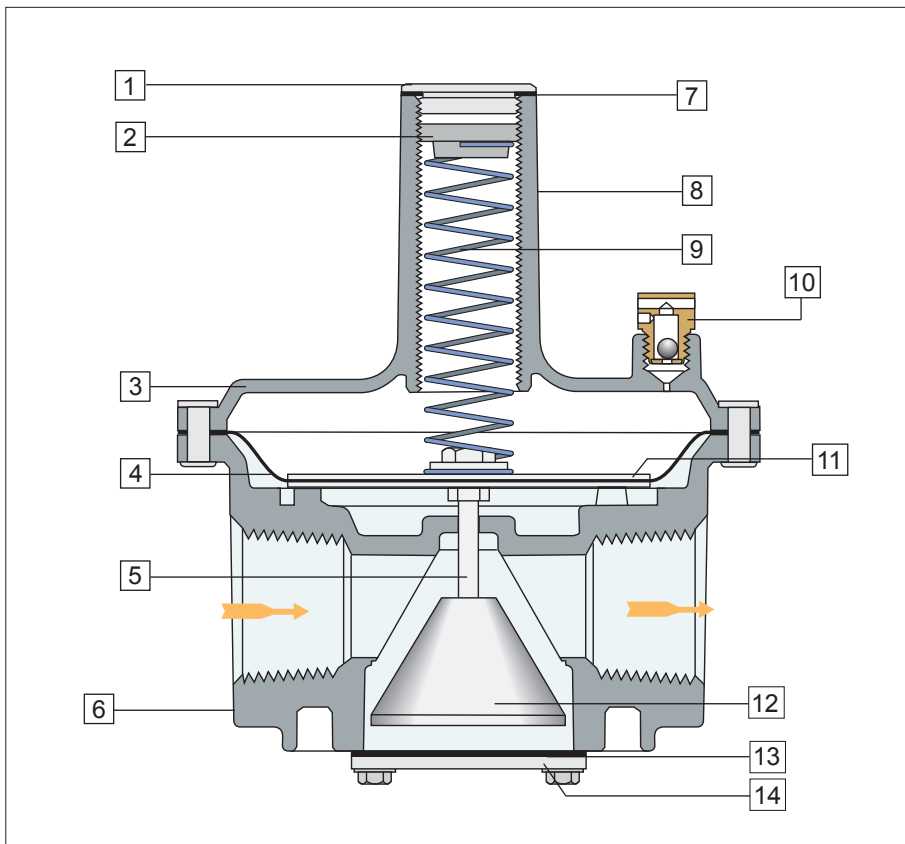


- 1 Welch Plug/Seal Cap
- 2 Vibration Resistant Adjusting Screw
- 3 Top Housing
- 4 Diaphragm
- 5 Stem
- 6 Bottom Housing
- 7 Seal Cap Gasket
- 8 Stack
- 9 Spring
- 10 Vent Limiting Device
- 11 Diaphragm Plates
- 12 Valve
- 13 Bottom Plate Gasket
- 14 Bottom Plate

# R/RS SERIES

*Balanced Value Design*

## Description

The R & RS regulators are ideal for industrial applications, capable of controlling pressure at extremely low flows. The double diaphragm balanced valve design makes it possible to build a regulator that is physically small yet has good capacity characteristics. They are able to maintain steady outlet pressure control with widely varying inlet pressures. Zero governor models available.

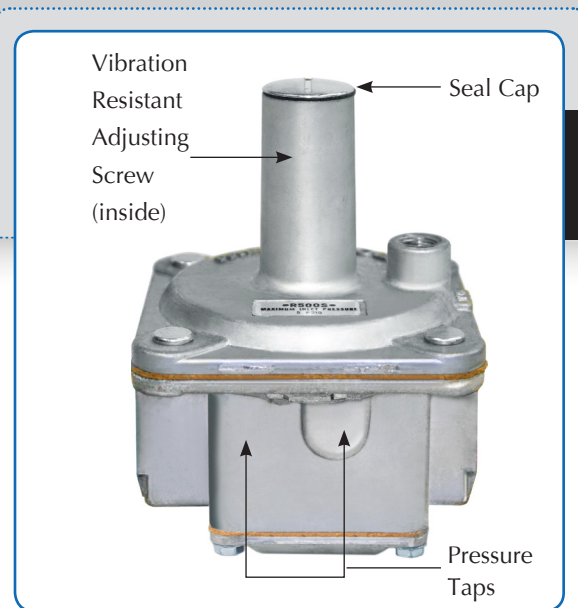

**R400(S)(Z)(M), R500(S)(Z)(M), R600(S)(Z)(M)**  
**BALANCED VALVE REGULATOR**

## Specifications

**Pipe Sizes** ..... 3/8" to 1" threaded connections with NPT threads or ISO7-Rp threads.

R400(S)(Z)(M): 3/8" x 3/8", 1/2" x 1/2"

R500(S)(Z)(M): 1/2" x 1/2", 3/4" x 3/4"

R600(S)(Z)(M): 3/4" x 3/4", 1" x 1"

**Housing Material** ..... Aluminum

**Venting**..... 1/8" NPT

**Mounting** ..... R400(S)Z(M) mount in an upright position only. R400(S)(M), R500(S)(Z)(M), R600(S)(Z)(M) suitable for multi-positional mounting. If ball check vent limiting device is installed, mount in an upright position only. Install with gas flowing as indicated by the arrow on bottom casting.

**NOTE:** All Maxitrol gas pressure regulators should be installed and operated in accordance with Maxitrol's Safety Warning Bulletins.

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. R400SM).

## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Certifications

	UL	CSA	CE
<b>Standard/Directive:</b>	ANSI/UL 842	ANSI Z21.18/CSA 6.3	EN 88 and GAD 2009/142/EEC
<b>Gas Types:</b>	Suitable for natural, manufactured, mixed gases, liquefied petroleum gases, and LP gas-air mixtures.	Suitable for natural, manufactured, mixed gases, liquefied petroleum gases, and LP gas-air mixtures.	Gas Families 1, 2, and 3 according to EN437
<b>Maximum Inlet Pressure:</b>	R400(S)(Z), R500(S)(Z), R600(S)(Z): 1 psi (6.9 kPa)	R400(S)(Z), R500(S)(Z), R600(S): 1/2 psi (3.45 kPa)	R400SM, R500SM, R600SM: 5.2 psi (36 kPa)  R400ZM, R500ZM, R600ZM: 1.4 psi (10 kPa)
<b>Maximum Air Loading Pressure:</b>	R400(Z), R500(Z), R600(Z): 2 psi (13.8 kPa)	---	---
<b>Outlet Pressure:</b>	R400(S), R500(S), R600(S): 1" to 22" w.c. (0.25 to 5.5 kPa)  R400(S)Z: -1.5" to 1" w.c. (-0.37 to 0.25 kPa)  R500(S)Z, R600(S)Z: -1" to 2.5" w.c. (-0.25 to 0.62 kPa)	R400(S), R500(S), R600(S): 3" to 12" w.c. (0.75 to 12 kPa)  R400(S)Z: -1.5" to 1" w.c. (-0.25 to 0.35 kPa)  R500(S)Z: -1" to 2.5" w.c. (-0.25 to 0.62 kPa)	R400SM, R500SM: 1" to 22" w.c. (0.25 to 5.5 kPa)  R600SM: 1" to 30" w.c. (0.25 to 7.5 kPa)  Z Models: -1" to 1.5" w.c. (-0.25 to 0.35 kPa)
<b>Ambient Temperature Ranges:</b>	---	R400(S)(Z), R500(S), R600(S): -40° to 205°F (-40° to 96°C)  R500(S)Z: 32° to 205°F (0° to 96°C)	All Models: 5° to 176°F (-15° to 80°C)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. R400SM).



# R/RS SERIES

*Balanced Valve Design*

## Pressure Tap Identification Numbers

Model	Inlet	Outlet
R400(S)(Z)(M)	NA	1 & 2
R500(S)(Z)(M)	3 & 4	1 & 2
R600(S)(Z)(M)	NA	1 & 2

## Capacities: Expressed in CFH (m<sup>3</sup>/h) @ 0.64 sp gr gas

Model	Pressure Drop* - inches water column (kPa)										
	0.2 (0.05)	0.4 (0.10)	0.6 (0.15)	0.8 (0.20)	1.0 (0.25)	1.5 (0.37)	2.0 (0.50)	2.5 (0.62)	3.0 (0.75)	3.5 (0.87)	4.0 (1.0)
R400S(Z)(M)	86 (2.4)	121 (3.4)	148 (4.1)	172 (4.8)	192 (5.4)	235 (6.8)	271 (7.6)	303 (8.5)	---	---	---
R500S(Z)(M)	196 (5.5)	277 (7.8)	340 (9.5)	392 (11.0)	438 (12.3)	537 (15.0)	620 (17.4)	693 (19.4)	760 (21.3)	820 (23.0)	876 (24.5)
R600S(Z)(M)	330 (9.2)	468 (13.1)	572 (16.0)	661 (18.2)	739 (20.7)	906 (25.4)	1,046 (29.3)	1,169 (32.7)	1,280 (35.8)	1,380 (38.6)	1,480 (41.4)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. R400SM).

\*See page 23 for pressure drop chart.

## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Spring Selection Charts

UL Certified Springs							
Model	Expressed in inches water column (kPa)						
R400(S)	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 6 (0.75 to 1.5)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5 to 12 (1.25 to 3)	10 to 22 (2.5 to 5.5)
R500(S)	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 6 (0.75 to 1.5)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5 to 12 (1.25 to 3)	10 to 22 (2.5 to 5.5)
R600(S)	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 6 (0.75 to 1.5)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5 to 12 (1.25 to 3)	10 to 22 (2.5 to 5.5)
"Z" Models	R400Z: -1.5 to 1 (-0.37 to 0.25); R500Z, R600Z: -1 to 2.5 (-0.25 to 0.62)						

CSA Certified Springs			
Model	Expressed in inches water column (kPa)		
R400(S)	3 to 6 (0.75 to 1.5)	---	5 to 12 (1.25 to 3)
R500(S)	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
R600(S)	3 to 6 (0.75 to 1.5)	4 to 8 (1 to 2)	5 to 12 (1.25 to 3)
"Z" Models	R400Z: -1.5 to 1 (-0.37 to 0.25); R500Z: -1 to 2.5 (-0.25 to 0.62)		

CE Certified Springs						
Model	Expressed in inches water column (kPa)					
R400SM	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	---
R500SM	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	---
R600SM	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.75 to 7.5)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. R400SM).


# R/RS SERIES

*Balanced Valve Design*


**Dimensions:** Expressed in inches (millimeters)

Model	Swing Radius	Dimensions			
		A	B	C	D
R400(S)(Z)(M)	2.38 (60)	3.25 (83)	0.94 (24)	2 (51)	2 (51)
R500(S)(Z)(M)	3.56 (90)	4.69 (119)	1.19 (30)	3 (76)	3.13 (79)
R600(S)(Z)(M)	4.32 (110)	5.68 (145)	1.46 (38)	4.03 (103)	3.88 (99)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. R400SM).

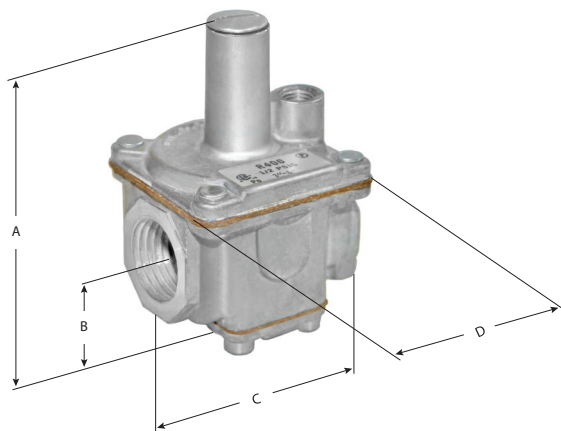

**R400(S)(Z)(M)**

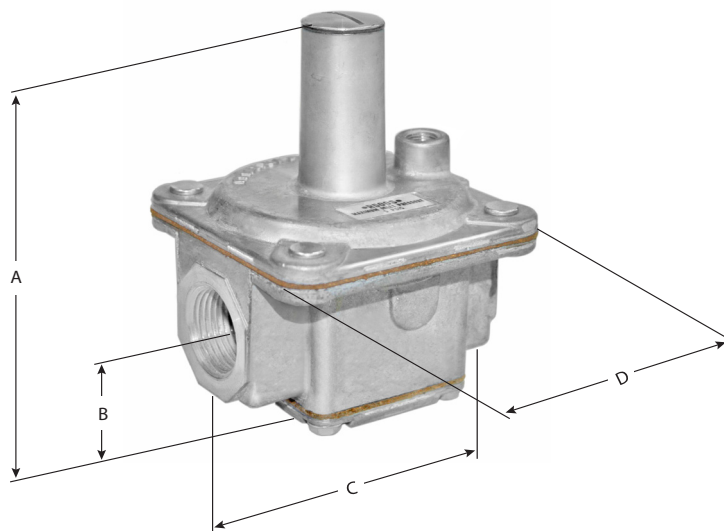


**R500(S)(Z)(M), R600(S)(Z)(M)**

**NOTE:** Dimensions are to be used only as an aid in designing clearance for the valve. Actual production dimensions may vary somewhat from those shown.

## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Balanced Valve Design

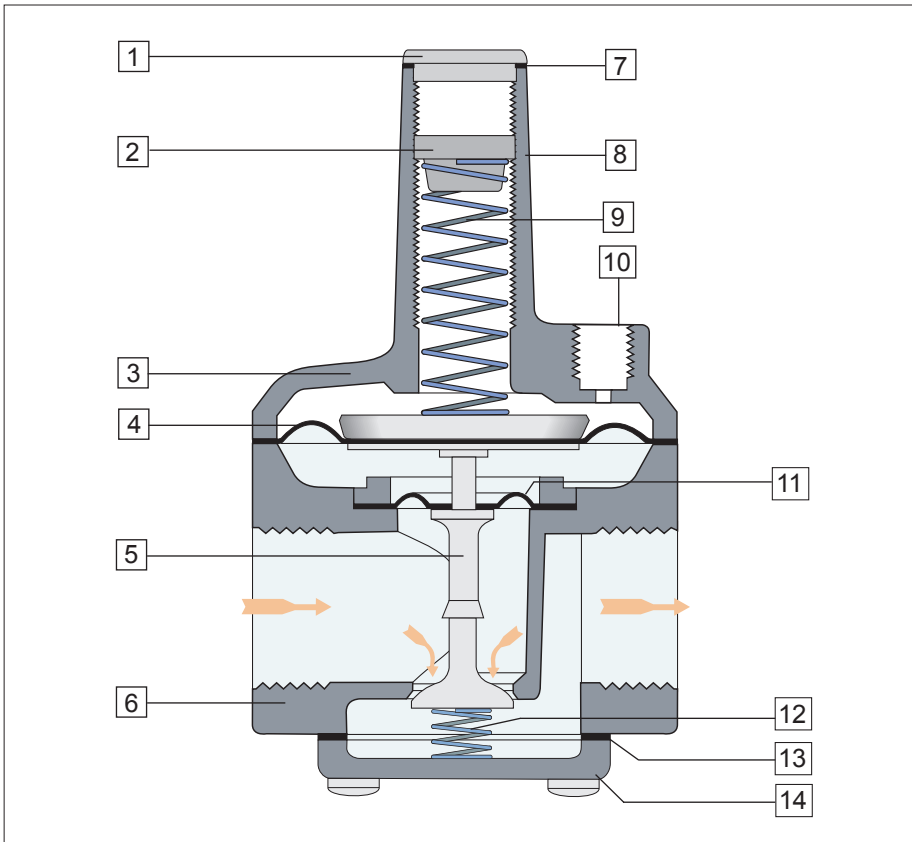


- 1 Welch Plug/Seal Cap
- 2 Vibration Resistant Adjusting Screw
- 3 Top Housing
- 4 Regulating Diaphragm
- 5 Stem & Valve
- 6 Bottom Housing
- 7 Seal Cap Gasket
- 8 Stack
- 9 Spring
- 10 Vent Connection
- 11 Balancing Diaphragm
- 12 Zero Spring (Z Model)
- 13 Bottom Plate Gasket
- 14 Bottom Plate

# 210 SERIES

*Balanced Valve Design*

## Description

The 210 Series is a lock-up type regulator. The balanced valve design eliminates the inlet pressure affect acting on the valve. Regulating stability is improved and hunting tendencies are reduced by the use of dampening mechanisms in both the breather outlet and the sensing tube. The 210 series provides precise regulation over a wide range of pressures and flow rates. Zero governor models available.

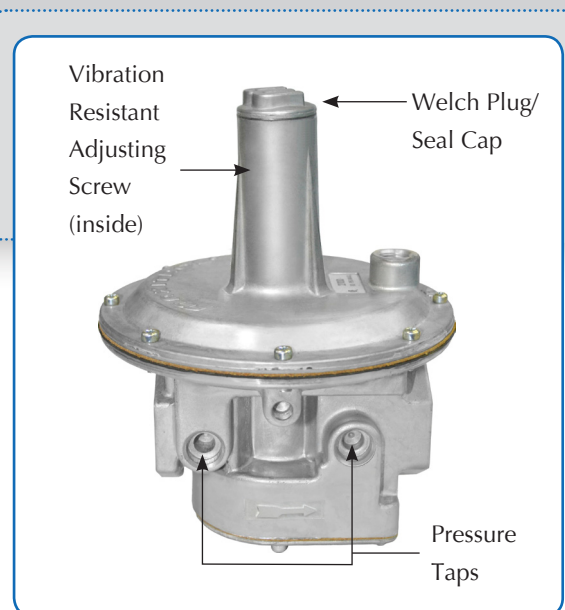

**210D(M), 210E(M), 210G(M)**  
**BALANCED VALVE REGULATOR**

## Specifications

**Pipe Sizes** ..... 1" to 3" threaded connections with NPT threads or ISO7-Rp threads. 4" Flange only.  
210D(Z)(M): 1" x 1", 1 1/4" x 1 1/4", 1 1/2" x 1 1/2"  
210E(Z)(M): 1 1/2" x 1 1/2", 2" x 2"  
210G(Z)(M): 2 1/2" x 2 1/2", 3" x 3"  
210J(Z)(M): 4" x 4", 125lb flange connection or DN100 flange according to ISO 7005-2 PN 16 (CE)

**Housing Material** ..... Aluminum

**Mounting** ..... Mount in an upright position only. Install with gas flowing as indicated by the arrow on bottom casting.

**NOTE:** All Maxitrol gas pressure regulators should be installed and operated in accordance with Maxitrol's Safety Warning Bulletins.

**Remote Sensing**..... 210D(Z)(M), 210E(Z)(M), 210G(Z)(M): 5 & 6

**Vibration Resistant Screw**... 210D(Z)(M): R8111-001, 210E(Z)(M): R9111-001

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. 210DM).



## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Certifications

	UL	CSA	CE
<b>Standard/Directive:</b>	ANSI/UL 842	ANSI Z21.18/CSA 6.3	EN 88 and GAD 2009/142/EEC
<b>Gas Types:</b>	Suitable for natural, manufactured, mixed gases, liquefied petroleum gases, and LP gas-air mixtures.	Suitable for natural, manufactured, mixed gases, liquefied petroleum gases, and LP gas-air mixtures.	Gas Families 1, 2, and 3 according to EN437
<b>Maximum Inlet Pressure:</b>	210D(Z)(M), 210E(Z)(M), 210G(Z)(M): 5 psi (34.5 kPa)	210D(Z), 210E(Z), 210G(Z): 10 psi (69 kPa)	210DM, 210EM, 210GM: 12.3 psi (85 kPa) Z models: 5.2 psi (36 kPa)
<b>Maximum Air Loading Pressure:</b>	210D(Z)(M), 210E(Z)(M), 210G(Z)(M): 6 psi (41.4 kPa)	---	---
<b>Outlet Pressure:</b>	210D(M), 210E(M), 210G(M): 1" to 42" w.c. (0.25 to 10.5 kPa) Z models: -1" to 1.5" w.c. (-0.25 to 0.35 kPa)	210D, 210E, 210G: 1" to 30" w.c. (0.25 to 7.5 kPa) Z models: -1" to 1.5" w.c. (-0.25 to 0.35 kPa)	210DM, 210EM, 210GM: 1" to 30" w.c. (0.25 to 7.5 kPa) 210JM: 2" to 42" w.c. (0.5 to 10.5 kPa) Z models: -1" to 1.5" w.c. (-0.25 to 0.35 kPa)

# 210 SERIES

*Balanced Valve Design*

## Pressure Tap Identification Numbers

Model	Inlet	Outlet
210D(Z)(M)	3 & 4	1 & 2
210E(Z)(M)		
210G(Z)(M)		
210J(Z)(M)		

**Capacities:** Expressed in CFH (m<sup>3</sup>/h) @ 0.64 sp gr gas

Model	Pipe Sizes	Pressure Drop* - inches water column (kPa) unless noted										
		0.1 (0.02)	0.3 (0.07)	0.5 (0.12)	1.0 (0.25)	3.0 (0.75)	5.0 (1.25)	7.0 (1.75)	1/2 psi (3.4)	3/4 psi (5.2)	1 psi (7.0)	1.5 psi (10.3)
210D(Z)(M)	1" x 1"	---	---	---	900 (25.5)	1600 (45.3)	2000 (56.6)	2400 (68.0)	3300 (93.5)	4100 (116.1)	4750 (134.5)	5800 (164.2)
	1 1/4" x 1 1/4"				1100 (31.2)	1900 (53.8)	2500 (70.8)	2900 (82.1)	4100 (116.1)	5000 (141.6)	5850 (165.7)	7150 (202.5)
	1 1/2" x 1 1/2"				1200 (34.0)	2100 (59.5)	2700 (76.5)	3200 (90.6)	4500 (127.4)	5500 (155.7)	6350 (179.8)	7750 (219.5)
210E(Z)(M)	1 1/2" x 1 1/2"	---	1050 (29.7)	1350 (38.2)	1915 (54.2)	3315 (93.9)	4280 (121.2)	5065 (143.4)	7125 (201.8)	8725 (247.1)	10075 (285.3)	12340 (349.4)
	2" x 2"		1210 (34.3)	1560 (44.2)	2210 (62.6)	3825 (108.3)	4940 (139.9)	5845 (165.5)	8225 (233.0)	10070 (285.2)	11630 (329.3)	14245 (403.4)
210G(Z)(M)	2 1/2" x 2 1/2"	1410 (39.9)	2450 (69.4)	3160 (89.5)	4470 (126.6)	7740 (219.2)	9995 (283.0)	11825 (334.9)	16635 (471.0)	20375 (577.0)	23525 (666.2)	28810 (815.8)
	3" x 3"	1555 (44.0)	2695 (76.3)	3475 (98.4)	4920 (139.3)	8520 (241.3)	11000 (311.5)	13020 (368.7)	18310 (518.5)	22425 (635.0)	25890 (733.1)	31710 (897.9)
210J(Z)(M)	4" x 4"	2700 (76.5)	4700 (133.1)	6000 (169.9)	8600 (243.5)	15000 (424.8)	19000 (538.0)	23000 (651.3)	32000 (906.1)	40000 (1132.7)	45000 (1274.3)	55700 (1577.3)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. 210DM).

\*See page 24 for pressure drop chart.

## Gas Pressure Regulators for Industrial Engines & Generator Sets

### Spring Selection Charts

UL Certified Springs											
Model	Expressed in inches water column (kPa)										
210D(Z)	1 to 3.5 (0.25 to 0.87)	4 to 8 (1 to 2)	5 to 15 (1.25 to 3.74)	2 to 5 (0.5 to 1.25)	3 to 6 (0.75 to 1.5)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5 to 12 (1.25 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.74 to 7.5)	20 to 42 (5 to 10.5)
210E(Z)	1 to 3.5 (0.25 to 0.87)	4 to 8 (1 to 2)	5 to 15 (1.25 to 3.74)	2 to 5 (0.5 to 1.25)	3 to 6 (0.75 to 1.5)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5 to 12 (1.25 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.74 to 7.5)	20 to 42 (5 to 10.5)
210G(Z)	1 to 3.5 (0.25 to 0.87)	4 to 8 (1 to 2)	5 to 15 (1.25 to 3.74)	2 to 5 (0.5 to 1.25)	3 to 6 (0.75 to 1.5)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5 to 12 (1.25 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.74 to 7.5)	20 to 42 (5 to 10.5)
210J(Z)	---	---	---	---	---	---	---	---	---	---	---

CSA Certified Springs										
Model	Expressed in inches water column (kPa)									
210D(Z)	1 to 3.5 (0.25 to 0.87)	4 to 8 (1 to 2)	5 to 15 (1.25 to 3.74)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5.5 to 12 (1.37 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.74 to 7.5)	
210E(Z)	1 to 3.5 (0.25 to 0.87)	4 to 8 (1 to 2)	5 to 15 (1.25 to 3.74)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5.5 to 12 (1.37 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.74 to 7.5)	
210G(Z)	1 to 3.5 (0.25 to 0.87)	4 to 8 (1 to 2)	5 to 15 (1.25 to 3.74)	2 to 5 (0.5 to 1.25)	3 to 8 (0.75 to 2)	4 to 12 (1 to 3)	5.5 to 12 (1.37 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.74 to 7.5)	
210J(Z)	---	---	---	---	---	---	---	---	---	---

CE Certified Springs						
Model	Expressed in inches water column (kPa)					
210D(Z)(M)	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.8 to 7.5)	20 to 42 (5 to 10.5)
210E(Z)(M)	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.8 to 7.5)	20 to 42 (5 to 10.5)
210G(Z)(M)	1 to 3.5 (0.25 to 0.9)	2 to 5 (0.5 to 1.25)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.8 to 7.5)	20 to 42 (5 to 10.5)
210J(Z)(M)	---	2 to 5 (0.5 to 1.25)	4 to 12 (1 to 3)	10 to 22 (2.5 to 5.5)	15 to 30 (3.8 to 7.5)	20 to 42 (5 to 10.5)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. 210DM).


# 210 SERIES

*Balanced Valve Design*


**Dimensions:** Expressed in inches (millimeters)

Model	Swing Radius	Dimensions			
		A	B	C	D
210D(Z)(M)	5.44 (138)	9 (228)	2.44 (62)	5.5 (140)	7 (178)
210E(Z)(M)	8.31 (211)	11.25 (286)	2.31 (59)	7.63 (194)	9.12 (232)
210G(Z)(M)	11.88 (302)	16.06 (408)	4.25 (107)	10.38 (264)	13.44 (341)
210J(Z)(M)	18 (457)	24.25 (616)	5.44 (138)	13.75 (349)	18 (457)

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. 210DM).

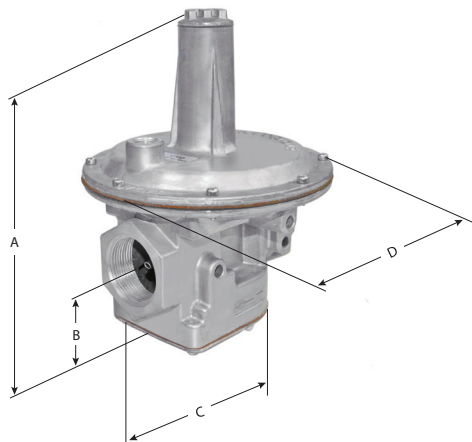

**210D(Z)(M), 210E(Z)(M), 210G(Z)(M)**

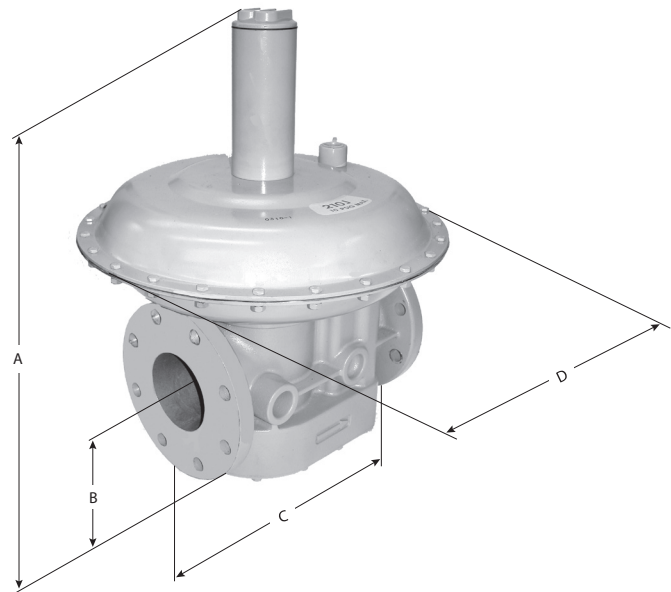


**210J(Z)(M)**

**NOTE:** Dimensions are to be used only as an aid in designing clearance for the valve. Actual production dimensions may vary somewhat from those shown.

## Gas Pressure Regulators for Industrial Engines & Generator Sets


### 210 Balanced Valve Design

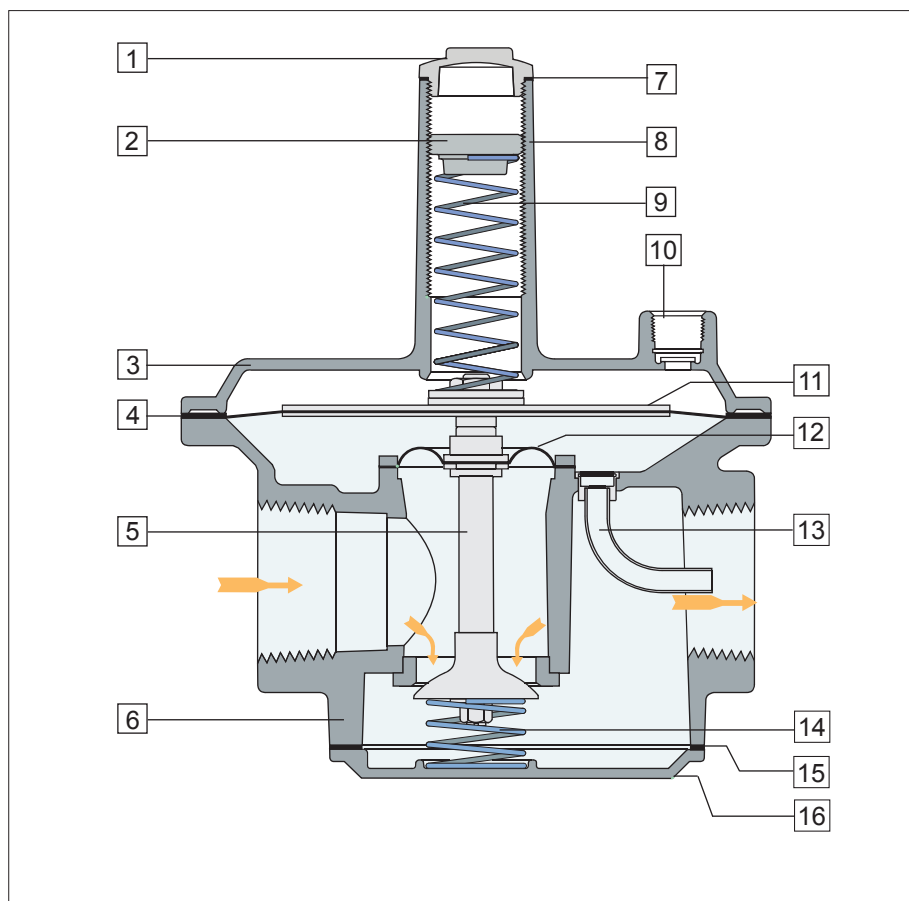

- 1 Welch Plug/Seal Cap
- 2 Vibration Resistant Adjusting Screw
- 3 Top Housing
- 4 Regulating Diaphragm
- 5 Stem & Valve
- 6 Bottom Housing
- 7 Seal Cap Gasket
- 8 Stack
- 9 Spring
- 10 Vent Connection
- 11 Diaphragm Plates
- 12 Balancing Diaphragm
- 13 Sensing Tube
- 14 Zero Spring (Z Model)
- 15 Bottom Plate Gasket
- 16 Bottom Plate

# PRESSURE DROP CHARTS

## RV Series Pressure Drop Chart

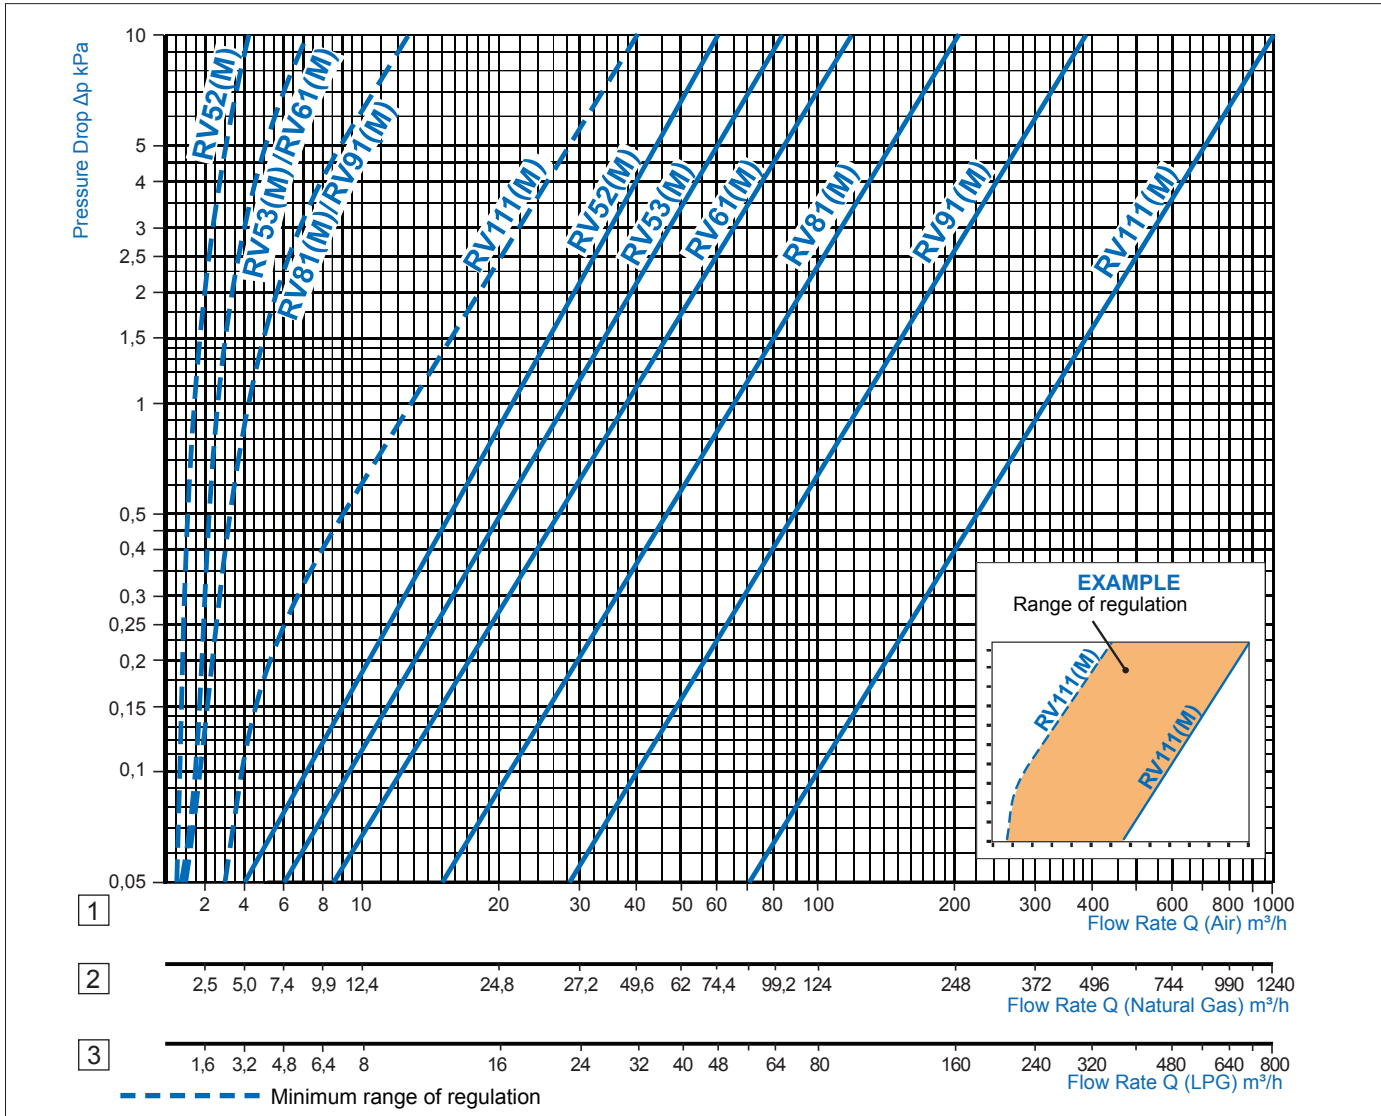


**NOTE:** Values below apply to all pressure drop charts on pages 22-24.

<p>1 = Air  <math>dv = 1.00</math>  <math>f = 1.00</math></p>	<p>2 = Natural Gas  <math>dv = 0.64</math>  <math>f = 1.24</math></p>	<p>3 = LPG  <math>dv = 1.56</math>  <math>f = 0.80</math></p>
$dv = \frac{\rho_{\text{gas}}}{\rho_{\text{air}}}$	$f = \sqrt{\frac{\rho_{\text{air}}}{\rho_{\text{gas}}}}$	$\dot{V}_{\text{gas}} = f \cdot \dot{V}_{\text{air}}$

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. RV52M).

## Gas Pressure Regulators for Industrial Engines & Generator Sets


### R/RS Series Pressure Drop Chart

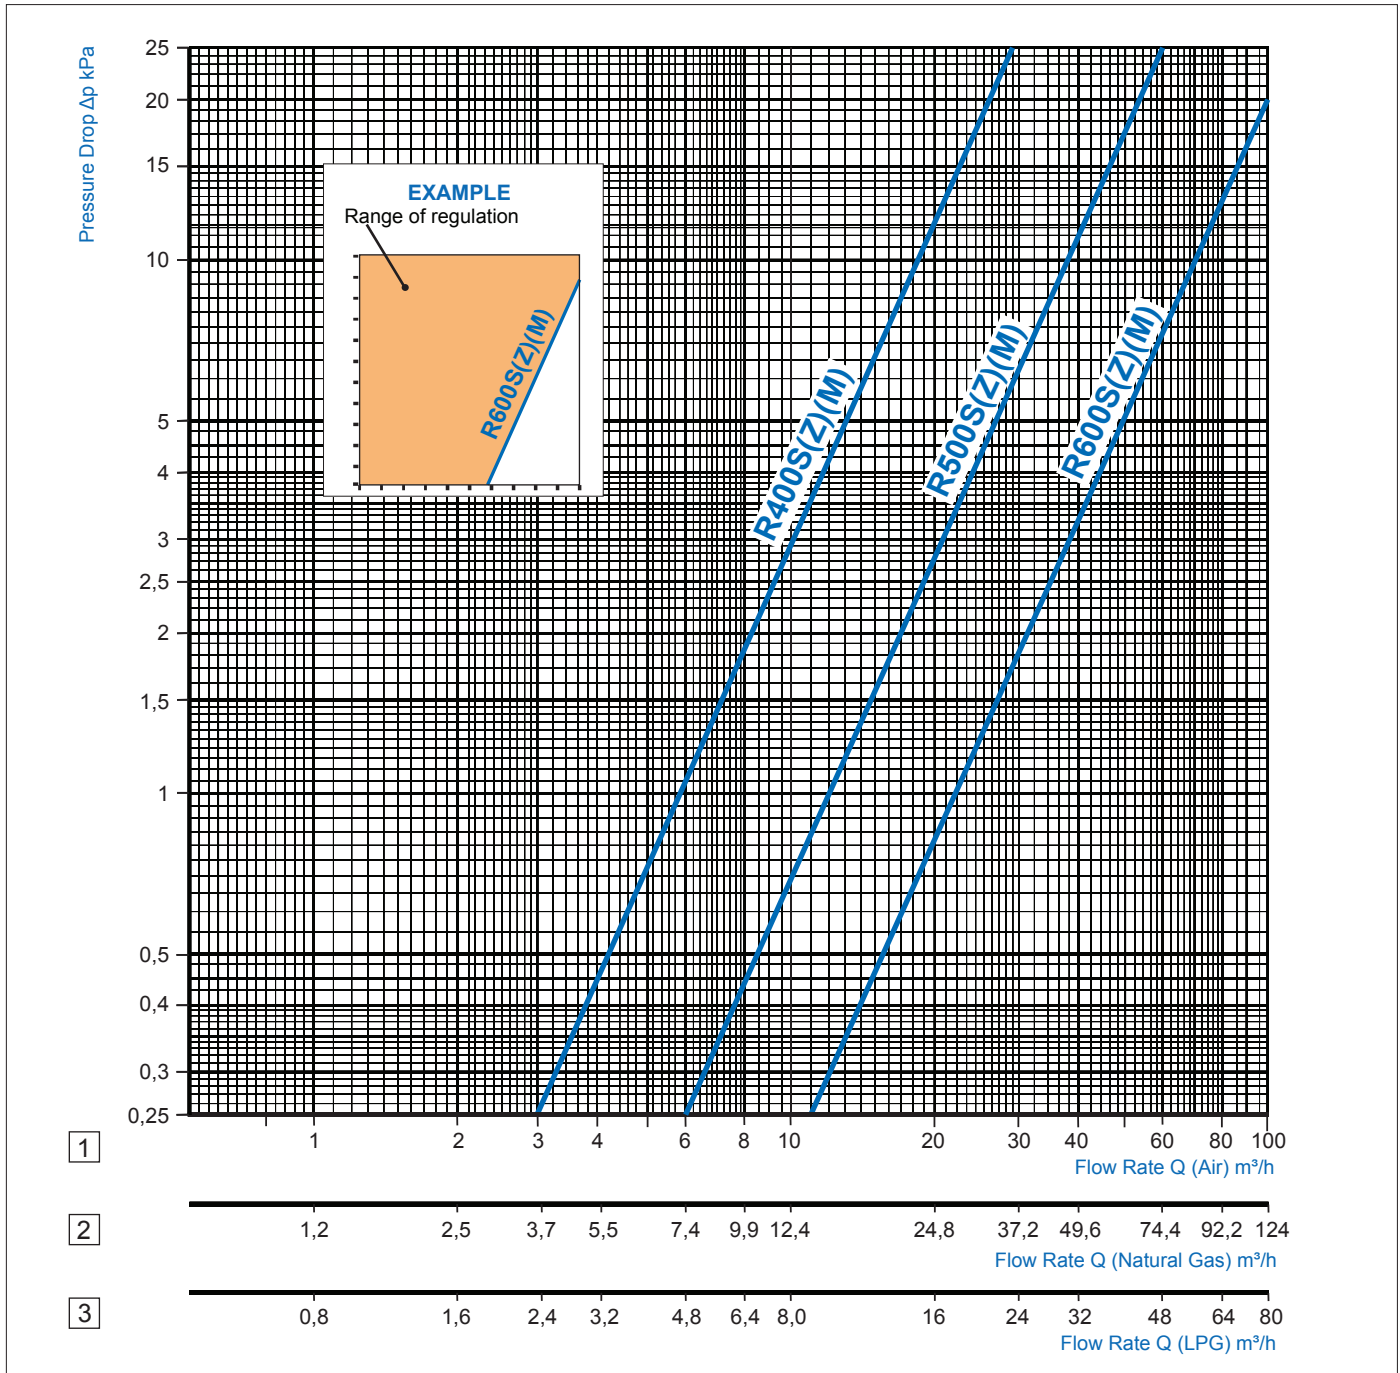

**NOTE:** Models with ISO7-Rp threads are designated by the suffix "M" (e.g. R400SM).

# PRESSURE DROP CHARTS

## 210 Series Pressure Drop Chart

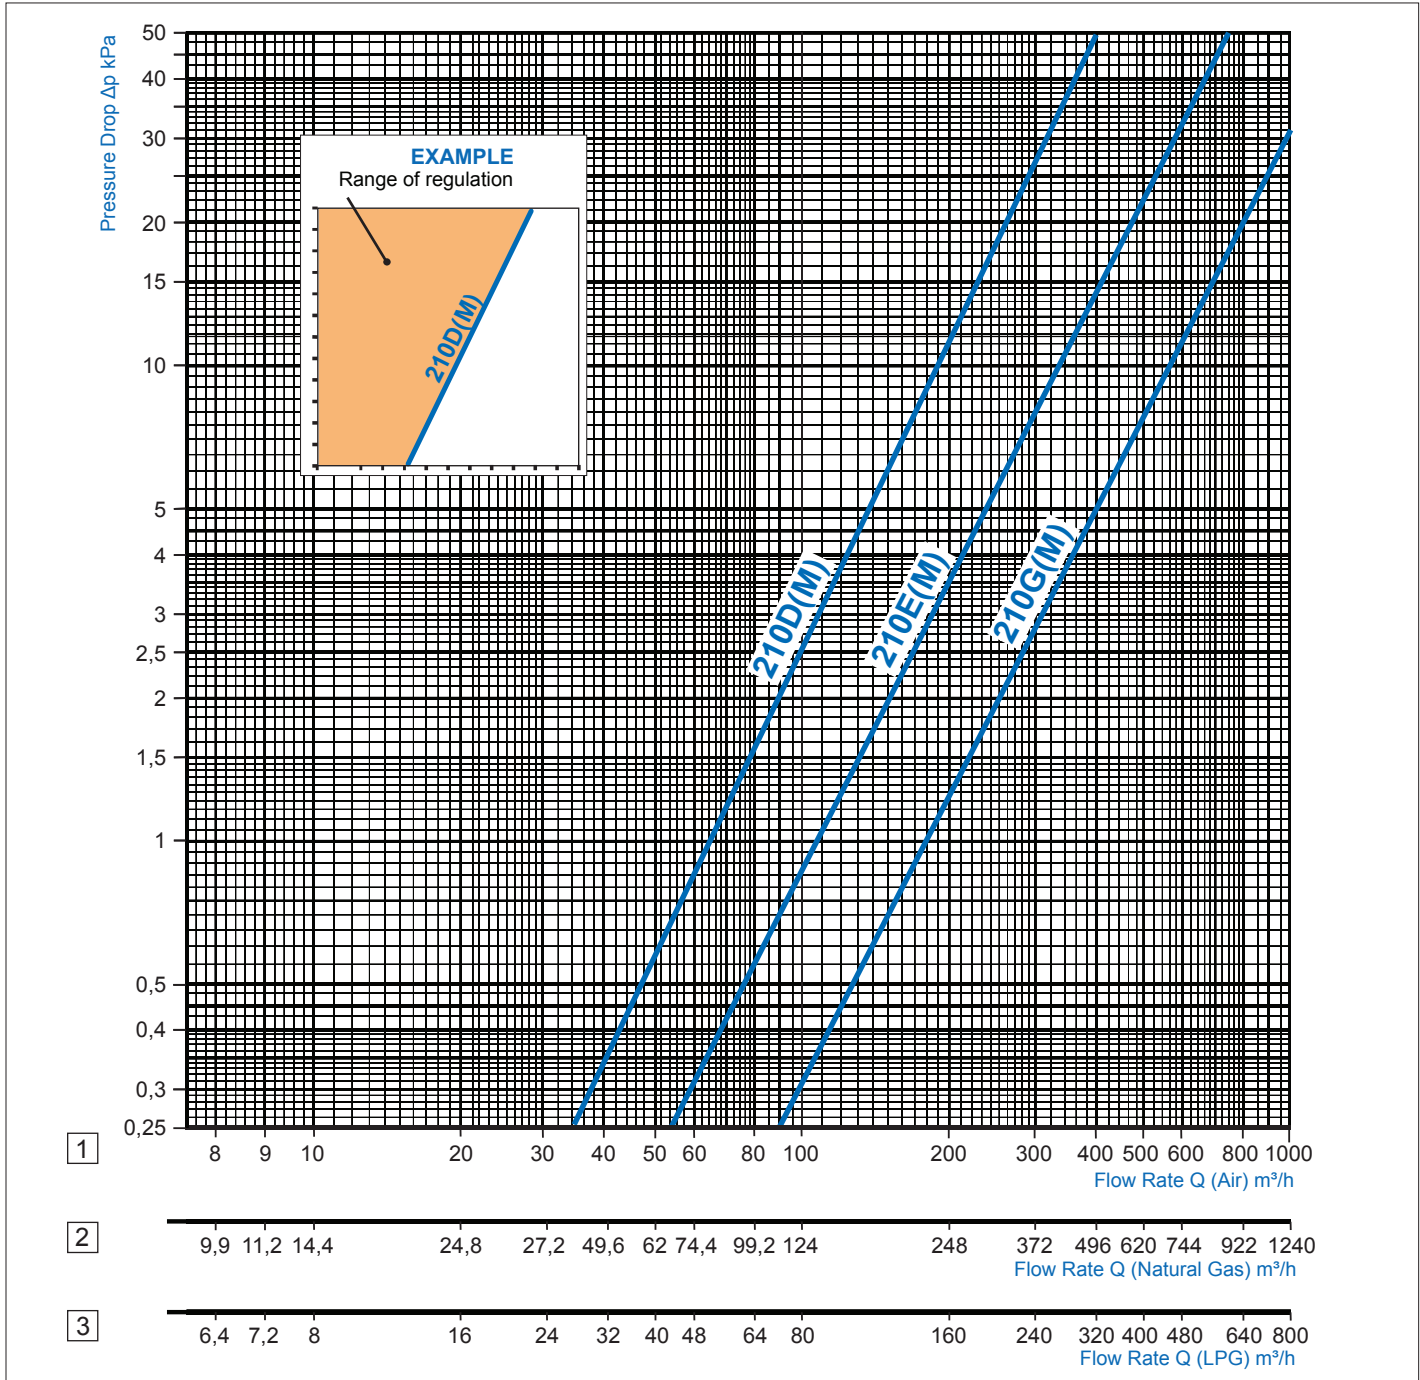

NOTE: Models with ISO7-Rp threads are designated by the suffix "M" (e.g. 210DM).









## **MAXITROL®**

Exclusive Distributor North America  
for Mertik Maxitrol

Maxitrol Company, Inc.  
23555 Telegraph Rd., PO Box 2230  
Southfield, MI 48037-2230  
USA  
Tel: +1 248-356-1400  
Fax: +1 248-356-0829  
[www.maxitrol.com](http://www.maxitrol.com)

## **MERTIK MAXITROL®**

Exclusive Distributor Europe  
for Maxitrol Company

Mertik Maxitrol GmbH & Co. KG  
Warnstedter Str. 3  
06502 Thale  
Germany  
Tel: + 49 3947 400-0  
Fax: + 49 3947 400-200  
[www.mertikmaxitrol.com](http://www.mertikmaxitrol.com)