


## LEVEL INDICATOR MN03

Product Line: **Pressure**

Membrane indicator for signaling the level reached by the materials thanks to the pressure exerted on the instrument. Die-cast aluminum housing.

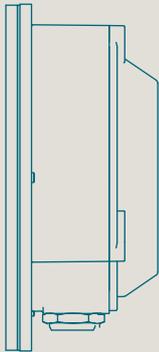

### VANTAGES

- An **EASY TO INSTALL** instrument that does not require any calibration, maintenance or specific tool for its installation.
- **DURABLE** and **RELIABLE** with aluminium casing, protection **IP65**.  
Relay contact rating: 10 A. at 250 V. a.c. Wiring with anti-vibration faston cable lugs. Ambient temperature for rubber membrane (MN-03) from -20 to +60°C and for viton membrane (MN-03 / V) from -20 to +80°C.



Solids



ATEX CERTIFICATE FOR DUST ZONE 22





# LEVEL INDICATOR MN03

Product Line: Pressure




Solids

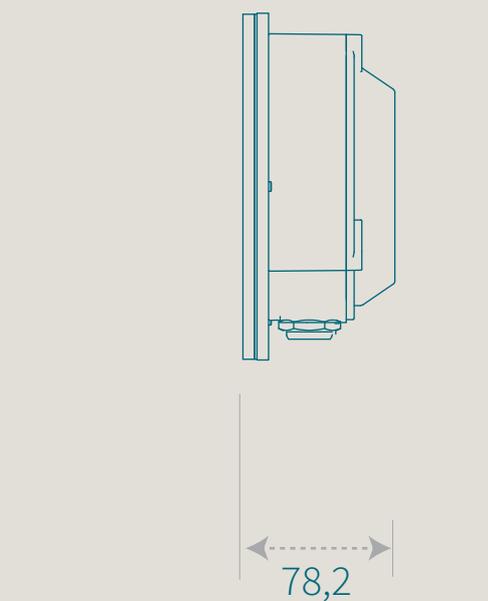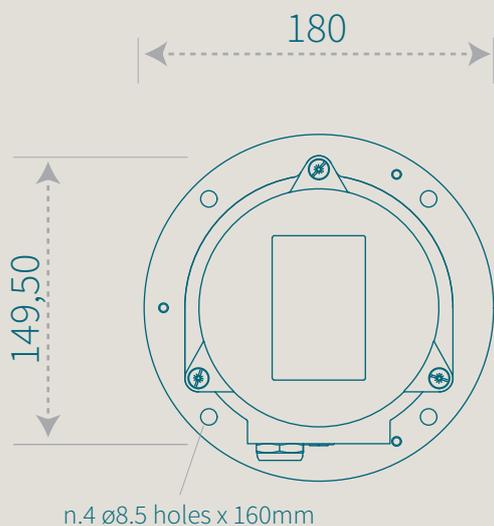

## Customizations

### Lamp

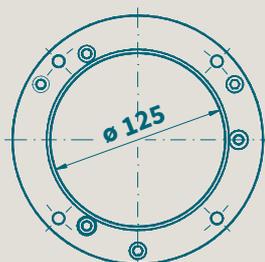

**Rubber** membrane up to **+60°C**

**Viton** membrane up to **+80°C**

